

Electrical Data


Frequency:	2400-2483 MHZ
Gain:	3 dBi
VSWR:	<1.5:1
Polarization:	Vertical
Horizontal Beamwidth :	360°
Vertical Beamwidth:	51°
Nominal Impedance:	50 Ohms
Max Input Power:	100 W
Lightning Protection:	DC Ground

Mechanical Data


Connector :	N Female
Dimensions:	Ø120*45mm
(diameter*length)	Ø4.72*1.77in
Weight:	0.25kg/0.55lb
Cable Length:	280mm
Reflector Material:	Aluminum Alloy
Radome Material:	Weatherproof ABS
Mounting Method:	Fit with nut
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65℃

Shipment Data

Packing Qty:	20pcs/Carton
Carton Size:	670*270*280mm
(length*width*height)	26.4*10.6*11.0in
Packing Weight:	6kg/13.22lb

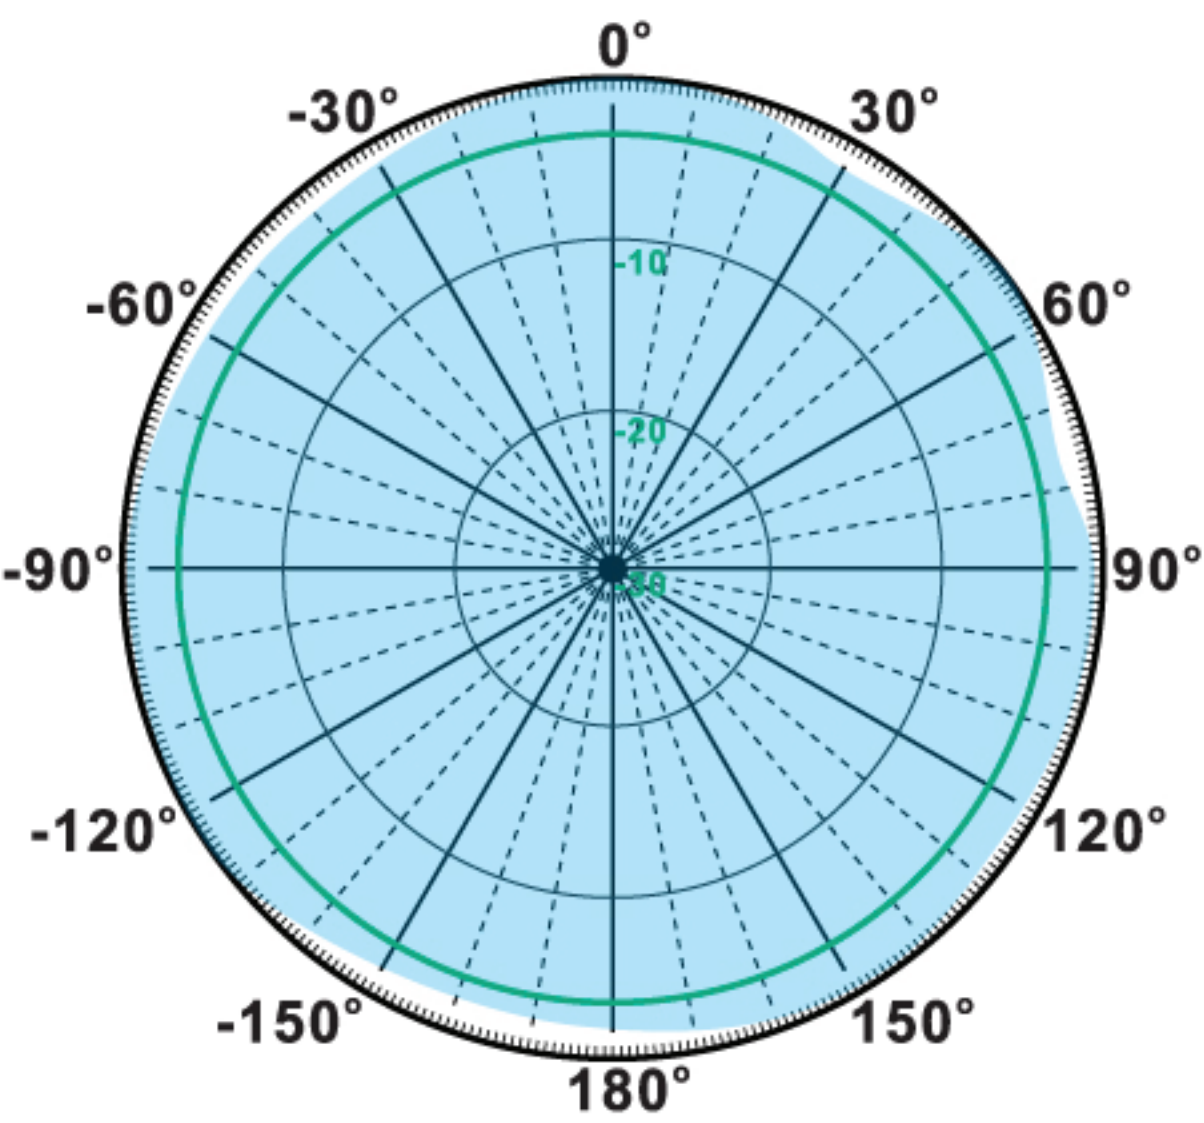

H-Plane

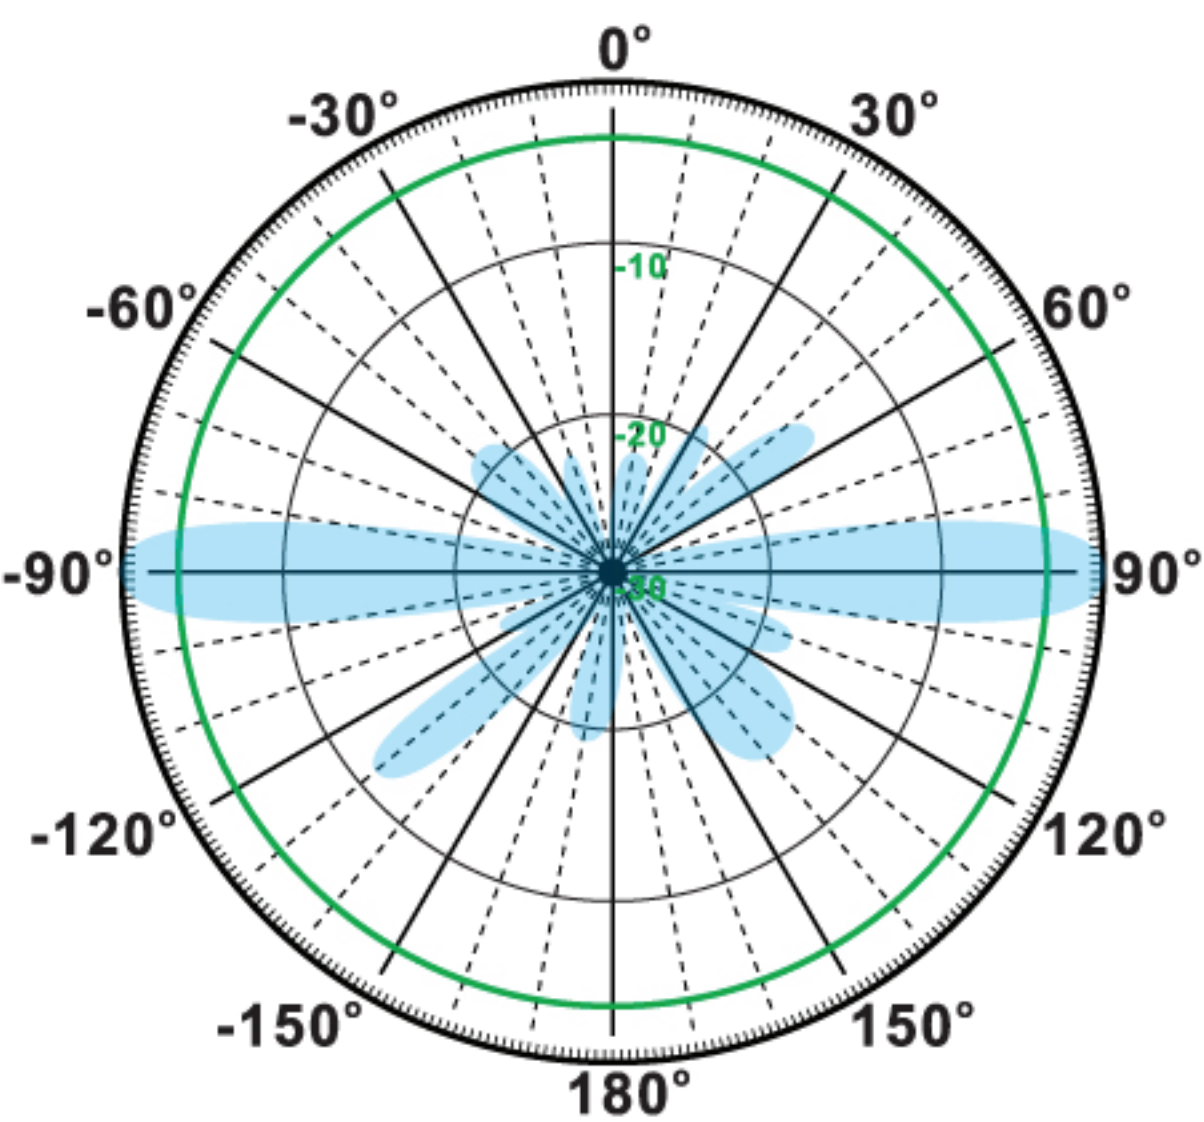

V-Plane

