


## INSTALLATION INSTRUCTIONS

MODELS TS-2, TS-3, TS-4, TS-5

UL FILE SA32686 CONFORMS TO UL STANDARD 294 FOR ACCESS CONTROL

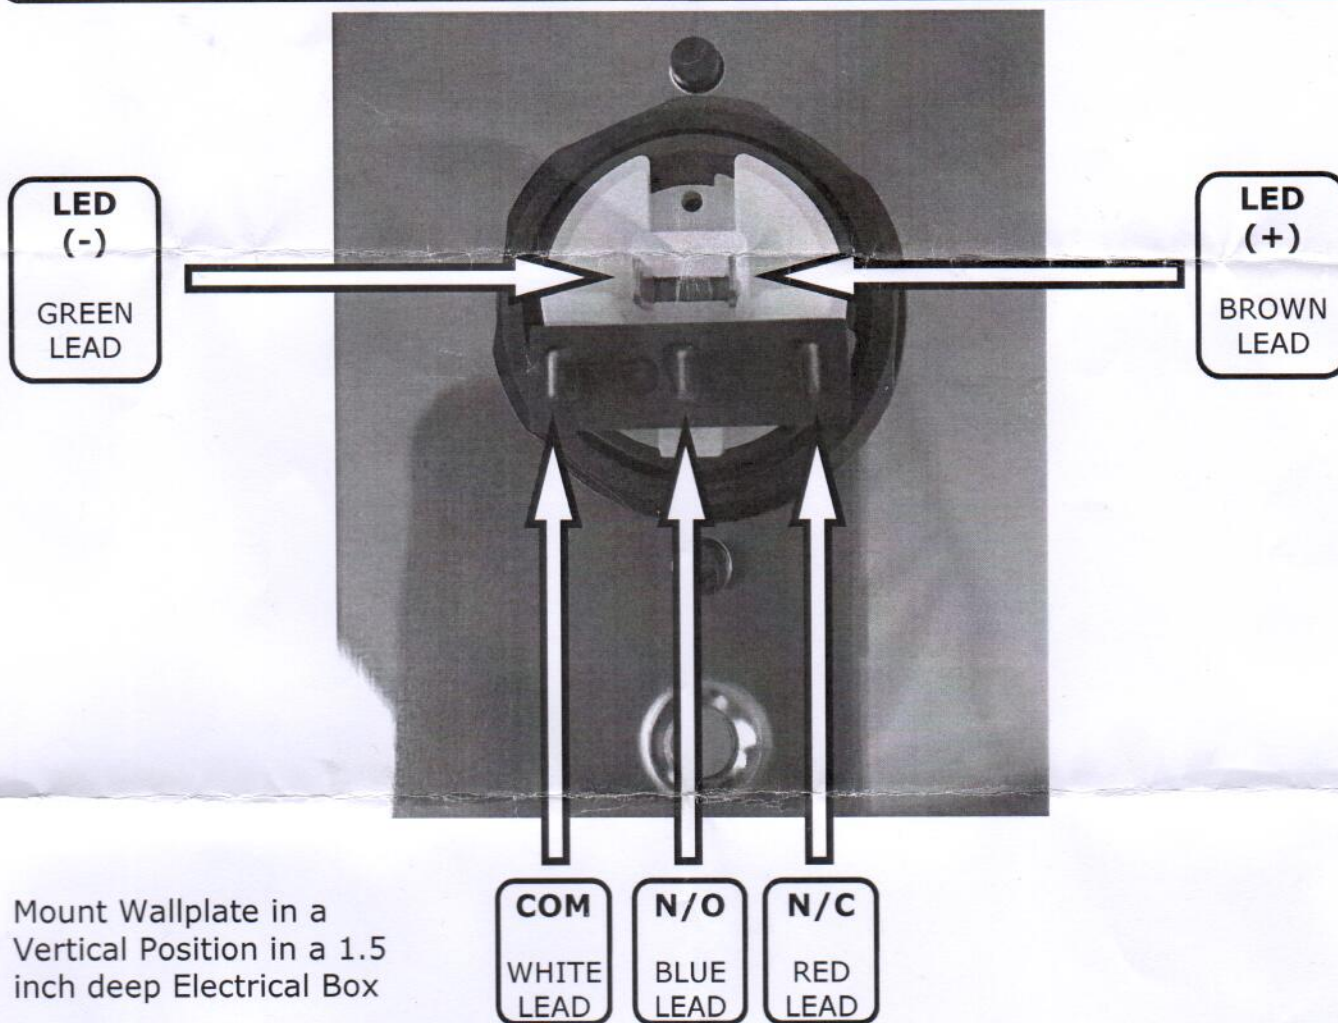

Mount Wallplate in a Vertical Position in a 1.5 inch deep Electrical Box

Switch Contacts rated 1A @35VDC

Pushbutton Illumination LED operates on 12 to 24 VDC

Pushbutton Illumination LED Current Draw -

4mA @12VDC

15mA @ 24VDC

### TS-3, TS-5 PLATE LED WIRING

| Colored Lead | Designation                    | Notes                                               |
|--------------|--------------------------------|-----------------------------------------------------|
| Red          | +24V Positive Input Power Lead | LED Current Draw -<br>12 VDC @ 9mA<br>24 VDC @ 19mA |
| White        | +12V Positive Input Power Lead |                                                     |
| Black        | Negative Input Power Lead      |                                                     |



**ASSA ABLOY**

Alarm Controls  
Phoenix, AZ 85044  
(800) 645-5538  
[www.alarmcontrols.com](http://www.alarmcontrols.com)

ASSA ABLOY, the global leader  
in door opening solutions

Doc D-009 Rev. A