
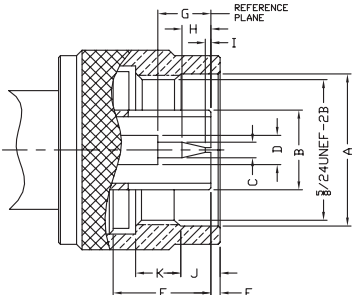


MALE		FEMALE																																																																												
	<table><tr><th>LETTER</th><th colspan="2">INCHES [MILLIMETERS]</th></tr><tr><th></th><th>MINIMUM</th><th>MAXIMUM</th></tr><tr><td>A</td><td>.630 [16.00]</td><td>-</td></tr><tr><td>B</td><td>-</td><td>.330 [8.38]</td></tr><tr><td>C</td><td>.063 [1.60]</td><td>.066 [1.68]</td></tr><tr><td>D</td><td>.118 [3.00]</td><td>.124 [3.15]</td></tr><tr><td>E</td><td>.016 [0.41]</td><td>.060 [1.52]</td></tr><tr><td>F</td><td>.398 [10.11]</td><td>.412 [10.46]</td></tr><tr><td>G</td><td>.210 [5.33]</td><td>.230 [5.84]</td></tr><tr><td>H</td><td>.130 [3.30]</td><td>.170 [4.32]</td></tr><tr><td>I</td><td>.003 [0.08]</td><td>-</td></tr><tr><td>J</td><td>.158 [4.01]</td><td>.168 [4.27]</td></tr><tr><td>K</td><td>.177 [4.50]</td><td>.197 [5.00]</td></tr></table>	LETTER	INCHES [MILLIMETERS]			MINIMUM	MAXIMUM	A	.630 [16.00]	-	B	-	.330 [8.38]	C	.063 [1.60]	.066 [1.68]	D	.118 [3.00]	.124 [3.15]	E	.016 [0.41]	.060 [1.52]	F	.398 [10.11]	.412 [10.46]	G	.210 [5.33]	.230 [5.84]	H	.130 [3.30]	.170 [4.32]	I	.003 [0.08]	-	J	.158 [4.01]	.168 [4.27]	K	.177 [4.50]	.197 [5.00]		<table><tr><th>LETTER</th><th colspan="2">INCHES [MILLIMETERS]</th></tr><tr><th></th><th>MINIMUM</th><th>MAXIMUM</th></tr><tr><td>A</td><td>-</td><td>.628 [15.93]</td></tr><tr><td>B</td><td>.336 [8.53]</td><td>.344 [8.74]</td></tr><tr><td>C</td><td>.316 [8.03]</td><td>.320 [8.13]</td></tr><tr><td>D</td><td>.118 [3.00]</td><td>.124 [3.15]</td></tr><tr><td>E</td><td>.422 [10.72]</td><td>-</td></tr><tr><td>F</td><td>.356 [9.04]</td><td>.362 [9.19]</td></tr><tr><td>G</td><td>.187 [4.75]</td><td>.207 [5.26]</td></tr><tr><td>H</td><td>.210 [5.33]</td><td>-</td></tr><tr><td>I</td><td>.172 [4.37]</td><td>.202 [5.13]</td></tr><tr><td>J</td><td>.047 [1.19]</td><td>.077 [1.96]</td></tr></table>	LETTER	INCHES [MILLIMETERS]			MINIMUM	MAXIMUM	A	-	.628 [15.93]	B	.336 [8.53]	.344 [8.74]	C	.316 [8.03]	.320 [8.13]	D	.118 [3.00]	.124 [3.15]	E	.422 [10.72]	-	F	.356 [9.04]	.362 [9.19]	G	.187 [4.75]	.207 [5.26]	H	.210 [5.33]	-	I	.172 [4.37]	.202 [5.13]	J	.047 [1.19]	.077 [1.96]
LETTER	INCHES [MILLIMETERS]																																																																													
	MINIMUM	MAXIMUM																																																																												
A	.630 [16.00]	-																																																																												
B	-	.330 [8.38]																																																																												
C	.063 [1.60]	.066 [1.68]																																																																												
D	.118 [3.00]	.124 [3.15]																																																																												
E	.016 [0.41]	.060 [1.52]																																																																												
F	.398 [10.11]	.412 [10.46]																																																																												
G	.210 [5.33]	.230 [5.84]																																																																												
H	.130 [3.30]	.170 [4.32]																																																																												
I	.003 [0.08]	-																																																																												
J	.158 [4.01]	.168 [4.27]																																																																												
K	.177 [4.50]	.197 [5.00]																																																																												
LETTER	INCHES [MILLIMETERS]																																																																													
	MINIMUM	MAXIMUM																																																																												
A	-	.628 [15.93]																																																																												
B	.336 [8.53]	.344 [8.74]																																																																												
C	.316 [8.03]	.320 [8.13]																																																																												
D	.118 [3.00]	.124 [3.15]																																																																												
E	.422 [10.72]	-																																																																												
F	.356 [9.04]	.362 [9.19]																																																																												
G	.187 [4.75]	.207 [5.26]																																																																												
H	.210 [5.33]	-																																																																												
I	.172 [4.37]	.202 [5.13]																																																																												
J	.047 [1.19]	.077 [1.96]																																																																												
SPECIFICATIONS		CABLE GROUPS																																																																												
ELECTRICAL SPECIFICATIONS IMPEDANCE: 50 Ω WORKING VOLTAGE RATING: 1,000 VRMS, CABLE DEPENDENT FREQUENCY RANGE: 0-11 GHZ MECHANICAL SPECIFICATIONS MATING: 5/8 - 24 THREADED COUPLING INTERFACE: MIL-STD-348, SECTION 304 CABLING: CLAMP, SOLDER AND CRIMP PLATING G - GOLD N - NICKEL S - SILVER WB - WHITE BRONZE DIELECTRIC MATERIAL T - PTFE		<table><tr><th>GRP</th><th>FOR THESE CABLE TYPES</th></tr><tr><td>B</td><td>TIMES LMR-100A; RG-174, 188, 188A, 316/U; ALPHA 9174, 9316; BELDEN 7805A, 8216, 83269, 83284, 84316; COMMSCOPE AMC-174, WBC-100</td></tr><tr><td>B1</td><td>RG-316/U DOUBLE SHIELD; RD-316; BELDEN 83269; COLEMAN 1596</td></tr><tr><td>C</td><td>TIMES LMR-195; RG-58, 58A, 58C, 141, 141A/U; ANDREW CNT-195, CNT-195-DB, CNT-195-FR; BELDEN 7806A, 8219, 8240, 8259, 8262, 9201, 9203, 9310, 9311; COMMSCOPE WBC-195, WBC-195R, 0268, TCOM-195, TCOM-195-FR; HARBOUR HPF195</td></tr><tr><td>C1</td><td>RG-55, 55A, 55B, 142, 142A, 142B, 223, 400/U; ALPHA 9055, 9055B, 9223; BELDEN 7806A, 83242, 84142</td></tr><tr><td>C2</td><td>TIMES LMR-200, MSI-22; ALPHA 9848; BELDEN 7807A; COMMSCOPE AMC-58LL, WBC-200, WBC-200R, TCOM-200, TCOM-200-FR; HARBOUR HPF200</td></tr><tr><td>C3</td><td>RG-58/U PLENUM, RG-122/U; ALPHA 9859, 9158S; BELDEN 82240, 82907, 88240, 89907</td></tr><tr><td>D</td><td>RG-59, 59A, 59B, 62, 62A, 62C/U; ALPHA 9059, 9062, 9830, 9840, 9845; BELDEN 8221, 8241, 9169, 9204, 9228; CANARE LV-61S; COMMSCOPE 5550, 5555, 5560, 5563</td></tr><tr><td>E</td><td>TIMES AA-4478; RG-8, 8A, 213/U; ALPHA 9008, 9213; BELDEN 8267, 9251, 9880, 89880; INTERCOMP 4082, 22132</td></tr><tr><td>E</td><td>RG-9, 9A, 9B, 214/U; ALPHA 9214; BELDEN 8242, 8268</td></tr><tr><td>I</td><td>TIMES AA-5886, AA-6146, LMR-400, LMR-400 ULTRAFLEX; ANDREW CNT-400, CNT-400AL, CNT-400-DB, CNT-400-FR, CNT-400-FRP; BELDEN 7810A, 8214, 9913; COMMSCOPE TCOM-400, TCOM-400-FR, TCOM-400-PUR, WBC-400, WBC-400R, CUSHCRAFT ULTRALINK TL93605; HARBOUR HPF400</td></tr><tr><td>L2</td><td>TIMES LMR-600, LMR-600 ULTRAFLEX; ANDREW CNT-600, CNT-600-DB, CNT-600-FR, ; COMMSCOPE TCOM-600, TCOM-600-FR, TCOM-600-PUR, WBC-600, WBC-600R</td></tr><tr><td>L6</td><td>TIMES LMR-300; ANDREW CNT-300, CNT-300AL, CNT-300-DB, CNT-300-FR; BELDEN 7809; COMMSCOPE TCOM-300, TCOM-300-FR, WBC-300</td></tr><tr><td>M</td><td>TIMES MSI-15; RG-122/U; BELDEN 82907, 88240, 89907; MOTOROLA WHITE PTFE</td></tr><tr><td>P</td><td>TIMES AA-3096; ANTENNA SPECIALIST K214, PRO-FLEX 800</td></tr><tr><td>PL</td><td>BELDEN 89913</td></tr><tr><td>SR1</td><td>.085 SEMI RIGID; RG-405/U; BELDEN 1671A; RD-179</td></tr><tr><td>SR2</td><td>.141 SEMI RIGID; RG-402/U; BELDEN 1673A</td></tr><tr><td>SR3</td><td>.250 SEMI RIGID; RG-401/U</td></tr><tr><td>X</td><td>TIMES LMR-240, LMR-240 ULTRAFLEX; RG-8X; ANDREW CNT-240, CNT-240AL, CNT-240ALS, CNT-240-DB, CNT-240-FR, CNT-240-W; BELDEN 9258; COMMSCOPE TCOM-240, TCOM-240-FR, WBC-240, WBC-240R; HARBOUR HPF240; MICRO 8/U; REMEE 1600; SAXTON 8315</td></tr></table>		GRP	FOR THESE CABLE TYPES	B	TIMES LMR-100A; RG-174, 188, 188A, 316/U; ALPHA 9174, 9316; BELDEN 7805A, 8216, 83269, 83284, 84316; COMMSCOPE AMC-174, WBC-100	B1	RG-316/U DOUBLE SHIELD; RD-316; BELDEN 83269; COLEMAN 1596	C	TIMES LMR-195; RG-58, 58A, 58C, 141, 141A/U; ANDREW CNT-195, CNT-195-DB, CNT-195-FR; BELDEN 7806A, 8219, 8240, 8259, 8262, 9201, 9203, 9310, 9311; COMMSCOPE WBC-195, WBC-195R, 0268, TCOM-195, TCOM-195-FR; HARBOUR HPF195	C1	RG-55, 55A, 55B, 142, 142A, 142B, 223, 400/U; ALPHA 9055, 9055B, 9223; BELDEN 7806A, 83242, 84142	C2	TIMES LMR-200, MSI-22; ALPHA 9848; BELDEN 7807A; COMMSCOPE AMC-58LL, WBC-200, WBC-200R, TCOM-200, TCOM-200-FR; HARBOUR HPF200	C3	RG-58/U PLENUM, RG-122/U; ALPHA 9859, 9158S; BELDEN 82240, 82907, 88240, 89907	D	RG-59, 59A, 59B, 62, 62A, 62C/U; ALPHA 9059, 9062, 9830, 9840, 9845; BELDEN 8221, 8241, 9169, 9204, 9228; CANARE LV-61S; COMMSCOPE 5550, 5555, 5560, 5563	E	TIMES AA-4478; RG-8, 8A, 213/U; ALPHA 9008, 9213; BELDEN 8267, 9251, 9880, 89880; INTERCOMP 4082, 22132	E	RG-9, 9A, 9B, 214/U; ALPHA 9214; BELDEN 8242, 8268	I	TIMES AA-5886, AA-6146, LMR-400, LMR-400 ULTRAFLEX; ANDREW CNT-400, CNT-400AL, CNT-400-DB, CNT-400-FR, CNT-400-FRP; BELDEN 7810A, 8214, 9913; COMMSCOPE TCOM-400, TCOM-400-FR, TCOM-400-PUR, WBC-400, WBC-400R, CUSHCRAFT ULTRALINK TL93605; HARBOUR HPF400	L2	TIMES LMR-600, LMR-600 ULTRAFLEX; ANDREW CNT-600, CNT-600-DB, CNT-600-FR, ; COMMSCOPE TCOM-600, TCOM-600-FR, TCOM-600-PUR, WBC-600, WBC-600R	L6	TIMES LMR-300; ANDREW CNT-300, CNT-300AL, CNT-300-DB, CNT-300-FR; BELDEN 7809; COMMSCOPE TCOM-300, TCOM-300-FR, WBC-300	M	TIMES MSI-15; RG-122/U; BELDEN 82907, 88240, 89907; MOTOROLA WHITE PTFE	P	TIMES AA-3096; ANTENNA SPECIALIST K214, PRO-FLEX 800	PL	BELDEN 89913	SR1	.085 SEMI RIGID; RG-405/U; BELDEN 1671A; RD-179	SR2	.141 SEMI RIGID; RG-402/U; BELDEN 1673A	SR3	.250 SEMI RIGID; RG-401/U	X	TIMES LMR-240, LMR-240 ULTRAFLEX; RG-8X; ANDREW CNT-240, CNT-240AL, CNT-240ALS, CNT-240-DB, CNT-240-FR, CNT-240-W; BELDEN 9258; COMMSCOPE TCOM-240, TCOM-240-FR, WBC-240, WBC-240R; HARBOUR HPF240; MICRO 8/U; REMEE 1600; SAXTON 8315																																			
GRP	FOR THESE CABLE TYPES																																																																													
B	TIMES LMR-100A; RG-174, 188, 188A, 316/U; ALPHA 9174, 9316; BELDEN 7805A, 8216, 83269, 83284, 84316; COMMSCOPE AMC-174, WBC-100																																																																													
B1	RG-316/U DOUBLE SHIELD; RD-316; BELDEN 83269; COLEMAN 1596																																																																													
C	TIMES LMR-195; RG-58, 58A, 58C, 141, 141A/U; ANDREW CNT-195, CNT-195-DB, CNT-195-FR; BELDEN 7806A, 8219, 8240, 8259, 8262, 9201, 9203, 9310, 9311; COMMSCOPE WBC-195, WBC-195R, 0268, TCOM-195, TCOM-195-FR; HARBOUR HPF195																																																																													
C1	RG-55, 55A, 55B, 142, 142A, 142B, 223, 400/U; ALPHA 9055, 9055B, 9223; BELDEN 7806A, 83242, 84142																																																																													
C2	TIMES LMR-200, MSI-22; ALPHA 9848; BELDEN 7807A; COMMSCOPE AMC-58LL, WBC-200, WBC-200R, TCOM-200, TCOM-200-FR; HARBOUR HPF200																																																																													
C3	RG-58/U PLENUM, RG-122/U; ALPHA 9859, 9158S; BELDEN 82240, 82907, 88240, 89907																																																																													
D	RG-59, 59A, 59B, 62, 62A, 62C/U; ALPHA 9059, 9062, 9830, 9840, 9845; BELDEN 8221, 8241, 9169, 9204, 9228; CANARE LV-61S; COMMSCOPE 5550, 5555, 5560, 5563																																																																													
E	TIMES AA-4478; RG-8, 8A, 213/U; ALPHA 9008, 9213; BELDEN 8267, 9251, 9880, 89880; INTERCOMP 4082, 22132																																																																													
E	RG-9, 9A, 9B, 214/U; ALPHA 9214; BELDEN 8242, 8268																																																																													
I	TIMES AA-5886, AA-6146, LMR-400, LMR-400 ULTRAFLEX; ANDREW CNT-400, CNT-400AL, CNT-400-DB, CNT-400-FR, CNT-400-FRP; BELDEN 7810A, 8214, 9913; COMMSCOPE TCOM-400, TCOM-400-FR, TCOM-400-PUR, WBC-400, WBC-400R, CUSHCRAFT ULTRALINK TL93605; HARBOUR HPF400																																																																													
L2	TIMES LMR-600, LMR-600 ULTRAFLEX; ANDREW CNT-600, CNT-600-DB, CNT-600-FR, ; COMMSCOPE TCOM-600, TCOM-600-FR, TCOM-600-PUR, WBC-600, WBC-600R																																																																													
L6	TIMES LMR-300; ANDREW CNT-300, CNT-300AL, CNT-300-DB, CNT-300-FR; BELDEN 7809; COMMSCOPE TCOM-300, TCOM-300-FR, WBC-300																																																																													
M	TIMES MSI-15; RG-122/U; BELDEN 82907, 88240, 89907; MOTOROLA WHITE PTFE																																																																													
P	TIMES AA-3096; ANTENNA SPECIALIST K214, PRO-FLEX 800																																																																													
PL	BELDEN 89913																																																																													
SR1	.085 SEMI RIGID; RG-405/U; BELDEN 1671A; RD-179																																																																													
SR2	.141 SEMI RIGID; RG-402/U; BELDEN 1673A																																																																													
SR3	.250 SEMI RIGID; RG-401/U																																																																													
X	TIMES LMR-240, LMR-240 ULTRAFLEX; RG-8X; ANDREW CNT-240, CNT-240AL, CNT-240ALS, CNT-240-DB, CNT-240-FR, CNT-240-W; BELDEN 9258; COMMSCOPE TCOM-240, TCOM-240-FR, WBC-240, WBC-240R; HARBOUR HPF240; MICRO 8/U; REMEE 1600; SAXTON 8315																																																																													
		FOR A MORE EXTENSIVE LISTING OF CABLE GROUPS																																																																												

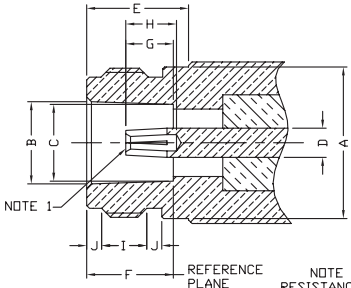

Strain reliefs for RG-58/U — available separately
PT-4015-03-BK (black), PT-4015-03-BL (blue)

FIG. 5
RFN-1004-1SP, -1SXFIG. 6
RFN-1005-1SR1, -1SR2FIG. 7
RFN-1005-2N, -3C, -3C1, -7, -B-03, -B1-03, -C1, -C2, -C2SFIG. 8
RFN-1005-5FIG. 9
RFN-1006-2L2FIG. 10
RFN-1006-3E, -3F, -3I, -3I2FIG. 11
RFN-1006-WB-I2FIG. 12
RFN-1006-8I

PHOTOS FOR REFERENCE ONLY, SHOWN AT 75% ACTUAL SIZE.

FOR MOUNTING CONFIGURATIONS

PART #	FIG	DESCRIPTION	CBL GRP	NOTES	REPLACES OR EQUIVALENT TO	PLATING			RECOM-MENDED TOOL
						BDY	P/C	DIE	
RFN-1000-1S	1	Male Clamp	C , C1	for RG-58/U & RG-142/U	UG-536A/U	S	G	T	RFA-4009-206
RFN-1000-C2	1	Male Clamp	C2	for Times LMR-200		N	G	T	RFA-4009-206
RFN-1000-C2S	1	Male Clamp	C2	for Times LMR-200		S	G	T	RFA-4009-206
RFN-1000-N	1	Male Clamp	C , C1	for RG-58/U & RG-142/U	UG-536B/U	N	G	T	RFA-4009-206
RFN-1001-S	2	Male Solder	C , C1 , C2 , D , E , I , P , X	for Cable Group C, C1, C2 use with Reducer RFU-530, for Cable Groups D, P & X use with Reducer RFU-531—Connector will Accept Maximum Center Conductor of OD .108 [2.74]		S	G	T	Solder Only
RFN-1002-1N	3	Male Clamp	E	for RG-8/U & RG-213/U	UG-218/U, D/U, E/U	N	G	T	RFA-4009-206
RFN-1002-1S	3	Male Clamp	E	for RG-8/U & RG-213/U	UG-218/U, D/U, E/U	S	G	T	RFA-4009-206
RFN-1002-1SI	3	Male Clamp	I	for Belden 9913 & Times LMR-400		S	G	T	RFA-4005-200
RFN-1002-2L2	4	Male Clamp	L2	for Times LMR-600		S	G	T	Solder Only
RFN-1002-PL	3	Male Clamp	PL	for Belden 89913 Plenum		S	G	T	RFA-4009-205
RFN-1004-1SP	5	Male Clamp	P	for Proflex		S	G	T	RFA-4009-206
RFN-1004-1SX	5	Male Clamp	X	for RG-8/X & Times LMR-240		S	G	T	RFA-4009-206
RFN-1005-1SR1	6	Male	SR1	for .085 Semi-Rigid	Direct Solder	N	G	T	Solder Only
RFN-1005-1SR2	6	Male	SR2	for .141 Semi-Rigid	Direct Solder	N	G	T	Solder Only
RFN-1005-2N	7	Male Crimp	C	for RG-58/U		N	G	T	RFA-4009-206
RFN-1005-3C	7	Male Crimp	C	for RG-58/U		S	G	T	RFA-4009-206
RFN-1005-3C1	7	Male Crimp	C1	for RG-142/U & RG-55/U		S	G	T	RFA-4009-206
RFN-1005-5	8	Male Crimp	C	Quick Disconnect, for RG-58/U		S	G	T	RFA-4009-206
RFN-1005-7	7	Male Crimp	C3 , M	for Motorola White PTFE, RG-58 Plenum or Belden 89907		S	G	T	RFA-4009-206
RFN-1005-B-03	7	Male Crimp	B	for RG-174/U & RG-316/U		N	G	T	RFA-4005-200
RFN-1005-B1-03	7	Male Crimp	B1	for RD-174/U & RG-316/U Double Shield		N	G	T	RFA-4005-200
RFN-1005-C1	7	Male Crimp	C1	for RG-142/U & RG-55/U		N	G	T	RFA-4009-206
RFN-1005-C2	7	Male Crimp	C2	for Times LMR-200		N	G	T	RFA-4009-206
RFN-1005-C2S	7	Male Crimp	C2	for Times LMR-200		S	G	T	RFA-4009-206
RFN-1006-2L2	9	Male Crimp	L2	for Times LMR-600		S	G	T	RFA-4005-305 & RFA-4009-201
RFN-1006-3E	10	Male Crimp	E	for RG-8/U & RG-213/U	UG-1681/U	S	G	T	RFA-4009-205
RFN-1006-3F	10	Male Crimp	E	for RG-9/U & RG-214/U	UG-1682/U	S	G	T	RFA-4009-205
RFN-1006-3I	10	Male Crimp	I	for Belden 9913 & Times LMR-400		S	G	T	RFA-4005-200
RFN-1006-3I2	10	Male Crimp	I2	for RG-8/U Type, LMR-400LLPL		S	G	T	
RFN-1006-WB-I2	11	Male Crimp	I2	for RG-8/U Type, LMR-400LLPL		WB	G	T	
RFN-1006-8I	12	Male Crimp	I	for Times LMR-400; Knurled Shell; 2-Piece Design	for solid center conductor cable only	N	G	T	RFA-4009-205