

HRD700V

Indoor / Outdoor Vandalproof Varifocal Dome Camera

Features

- EPCOM 1/3" Ultra HR+.
- High Sensitivity, 0.2 Lux/F1.2 (0 Lux IR ON).
- **720 TVL Standard resolution camera**
- True Day Night (ICR).
- Automatic White Balance.
- Automatic Electric Shutter.
- Smart IR Control.
- Power Supply: DC12V.



IK10
VANDALPROOF



HRD700V


Applications

Applicable to corridor, schools, shopping malls, telecom, etc.

Specifications

	HRD700V
Image Sensor	EPCOM 1/3" Ultra HR+
Signal System	NTSC, PAL
Effective Pixels	976 (H) x 496 (V)
Resolution	720TVLines
S/N Ratio	> 52dB (AGC Off)
Min. Illumination	0.1 Lux/F1.2 (0.2 Lux IR ON)
Video Output	1.0Vp-p/75Ω
Scanning System	2:1 Interlace
Synchronization	Internal
Day & Night	AUTO
White Balance	AUTO
AGC	AUTO
Electronic Shutter	AUTO
Infrared Lamp	15pcs
Lens	2.8 - 12mm
Infrared Range	20m
Input Voltage	DC12±10%
Current	300mA
Power Consumption	> 3.7W
Weight	930g
IP Rating	IP66
Operating Temperature	-10 - 50 °C (14 - 122 °F)
Operating Humidity	>85%RH(Non-condensation)

Dimensions

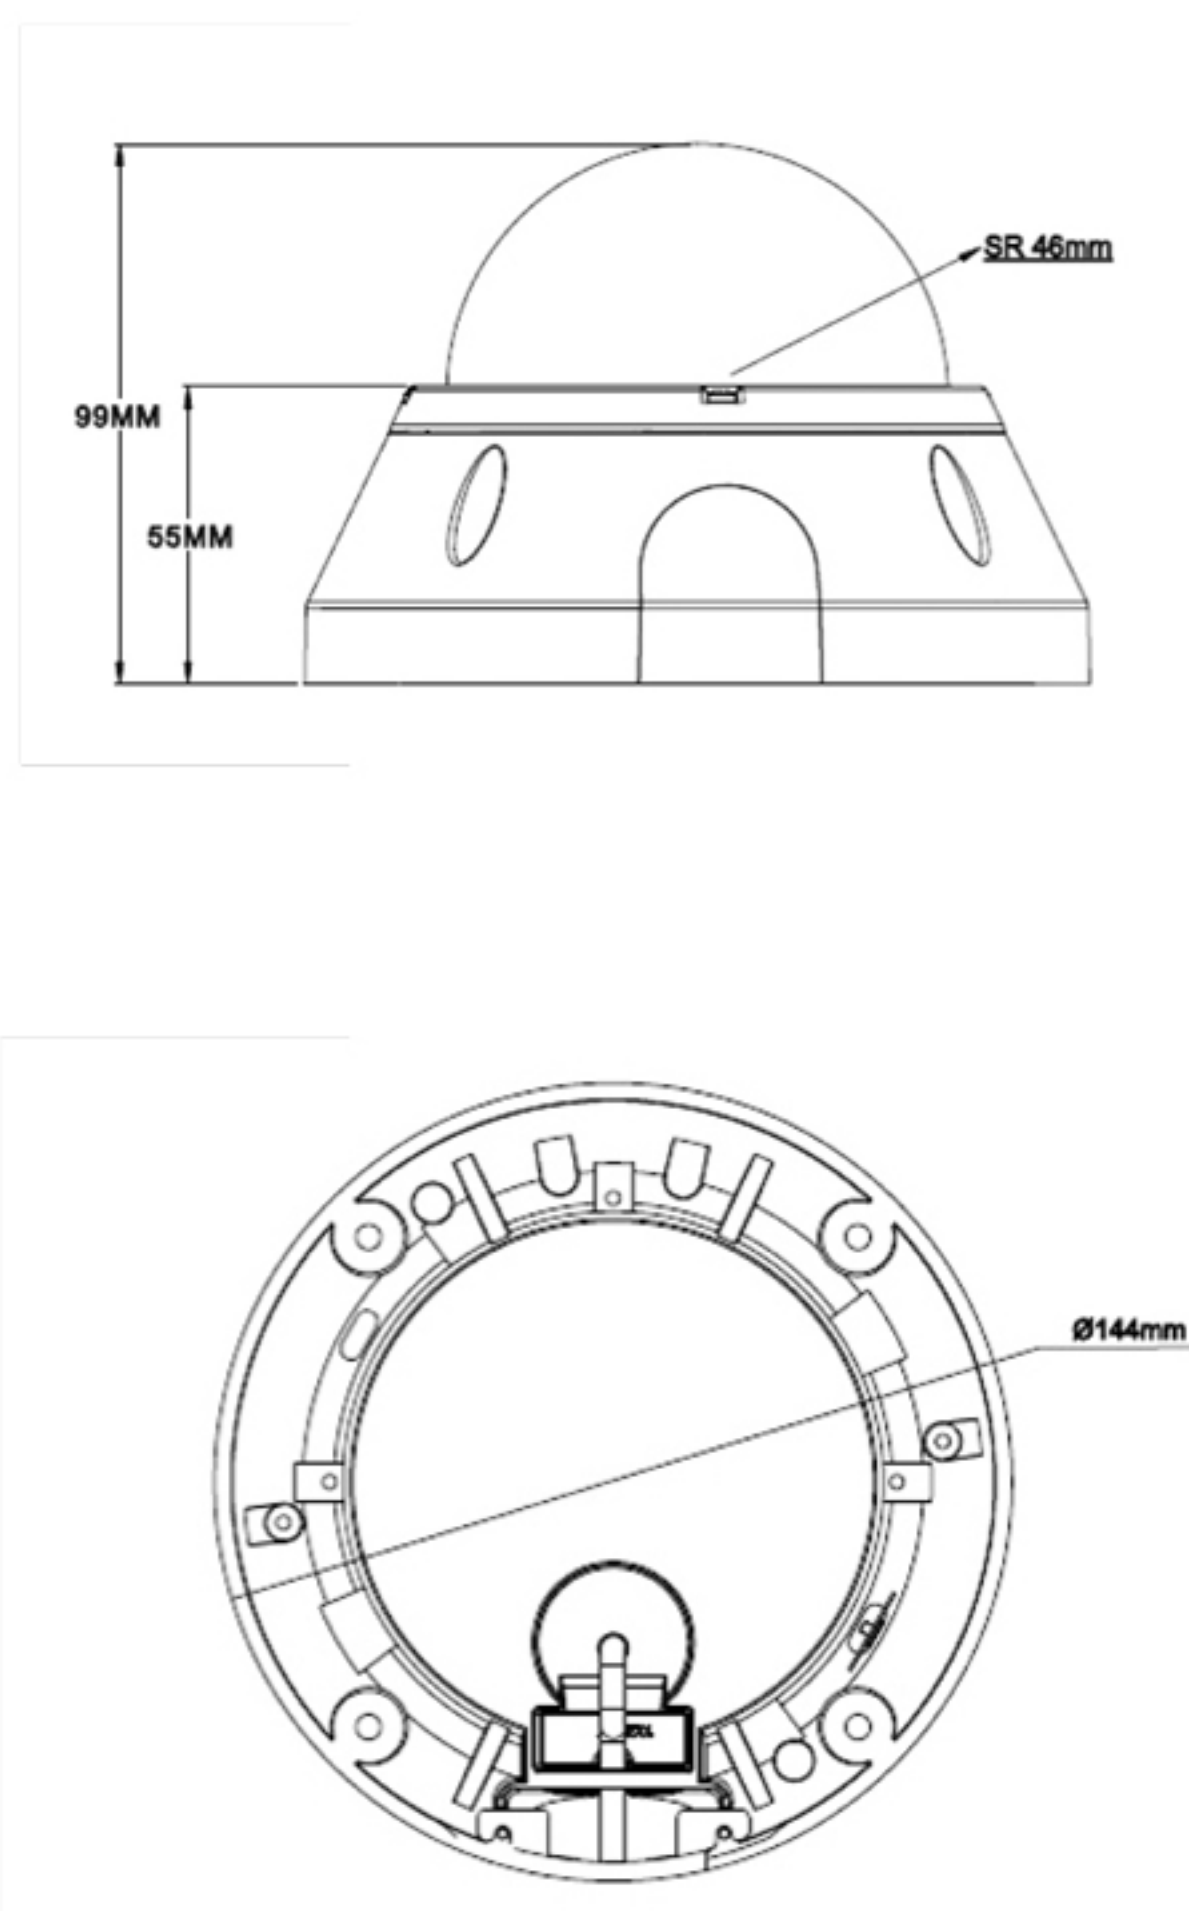

* All specifications are subject to change without notice.

* All brand names and registered trademarks are the property of their respective owners.