

DS-D4629C/A1**DS-D4629C/A1 Aries Spare parts package-indoor P2.9 500x500**

- P3.9 500 mm × 500 mm indoor rental LED cabinet spare parts package, including cables, spare modules, spare power supplies, maintenance spare parts, packaged in aviation case.


▪ Specification

Cabinet	
Pixel Configuration	SMD Triad LED
Pixel Pitch Category	P2.9
Pixel Density	112896 dots/m ²
Lamp Board Housing	With housing
Cabinet Material	Aluminium
Maintenance Method	Rear maintenance
Key Material	
Lamp Encapsulation	SMD2020
Control System	Hikvision
Display	
White Balance Brightness	1000 cd/m ²
Color Temperature	6500K adjustable
Viewing Angle	Horizontal 160°, vertical 140°
Contrast Ratio	≥ 6000:1
Color Uniformity	≤ ± 0.004Cx , Cy
Brightness Uniformity	≥ 97%
Processing Performance	
Driving Method	Constant current driving
Frame Frequency	50/60 Hz
Refresh Rate	Up to 3840 Hz
Grey Level	14 bit
Power	
Power Supply	110~220 VAC ± 15%
Working Environment	
Working Temperature	-40 °C to +45 °C (-40 °F to +113 °F)
Working Humidity	10%~95%RH (No condensation)
Storage Humidity	10%~95%RH (No condensation)
Storage Temperature	-40 °C to +60 °C (-40 °F to +140 °F)
General	
Package Dimension (W × H × D)	924 (W) mm × 690 (H) mm × 528 (D) mm
Packing List	Module × 8 Main Network Cable (20 m) × 3 Main Power Cord (10 m) × 3 Cascading Network Cable × 41 Cascading Power Cord × 41 Joint Piece and Screw × 40 Driver IC × 40 Lamp Bead × 600 Power Supply × 2 Mask × 20 Power Input Aviation Plug (with Cord) × 1 Power Output Aviation Plug (with Cord) × 1 Aviation Plug for Network Interface × 1 Internal Network Cable × 1 Receiving Card × 2 Hub Board × 2
Gross Weight	47 kg (103.62 lb.)

▪ Available Model

DS-D4629C/A1

▪ Dimension

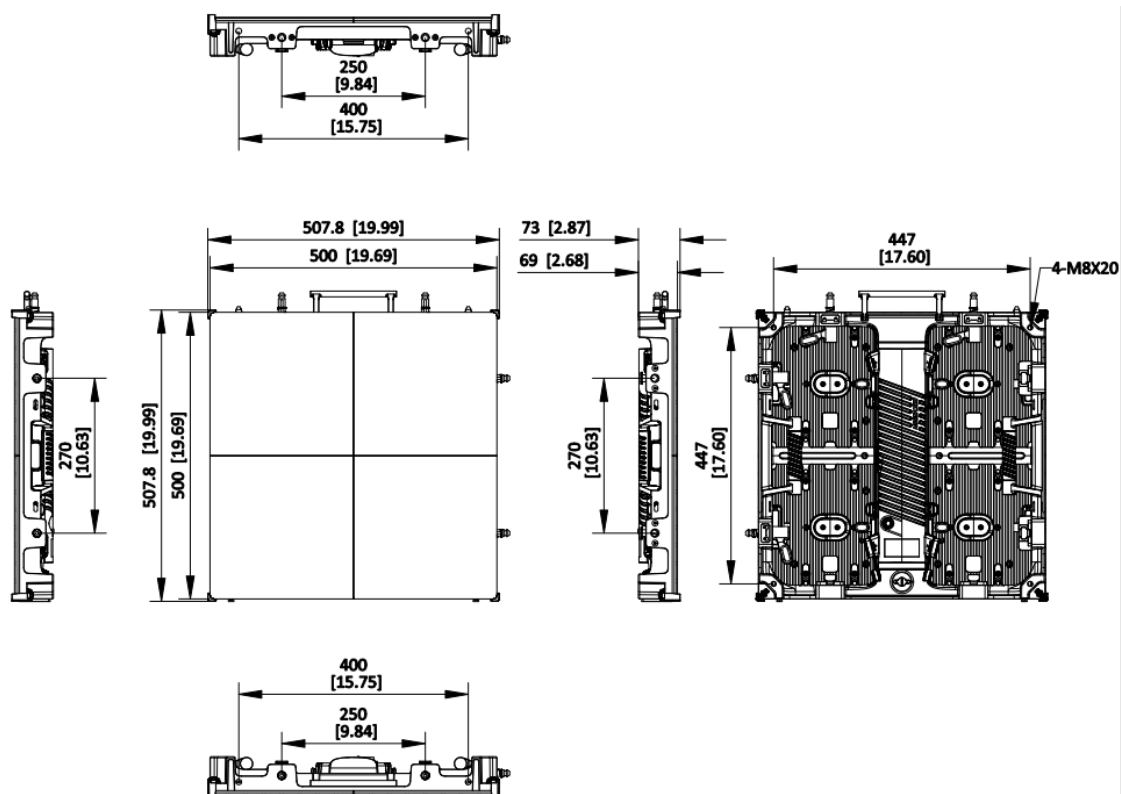

Unit: mm [inch]

SCALE	1:2
-------	-----

- Accessory
- Included

DS-D4629CD-1A	DS-D4629CD-1AC
---------------	----------------



See Far, Go Further



www.hikvision.com
support@hikvision.com

