

CMIC-1

One-row Chassis-well and Microphone Product Installation Document

PN 52476:A 04/08/20005 ECN 05-067

CMIC-1 contains the hand-held MIC-1 microphone with push-to-talk button, a single-row chassis well for installation in chassis CA-1, and the microphone-mounting bracket.

1. Attach the microphone bracket to the single-well with the three self-tapping screws (P/N 38062) as shown in Figure 1.
2. Attach the single-well to chassis CA-1 with the three nuts (P/N 36045) as shown in Figure 2.
3. Snap the protective bushing (P/N 43268) around the microphone cord and feed the connector through the keyhole. Push the bushing into place until it is firmly seated (see Figure 3).

See the *CA-1 Installation Document* for instructions on mounting the CA-1 to the backbox and attaching a dress plate.

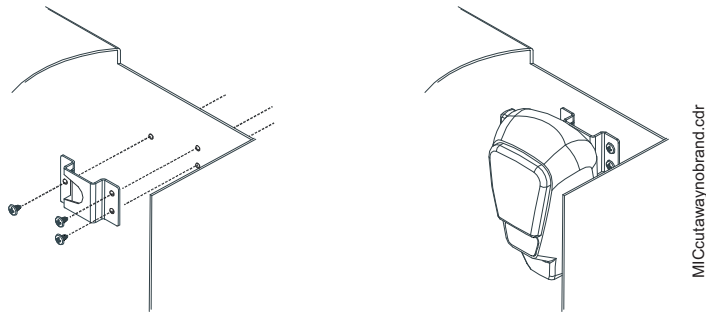


Figure 1 Installing the Microphone Bracket

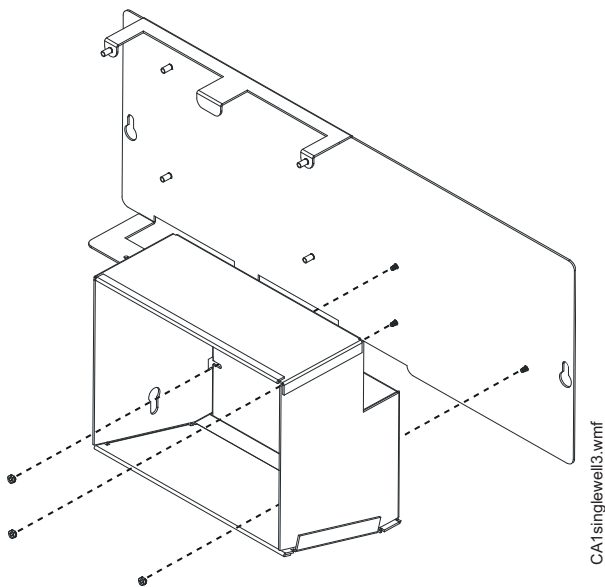


Figure 2 Attaching CMIC-1 onto CA-1

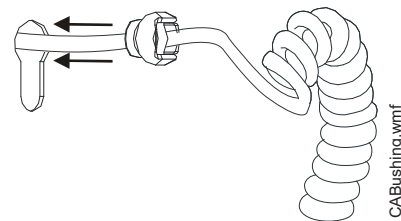


Figure 3 Attaching the Bushing