

► Model LSL

Litestak® Incandescent Status Indicators



Federal Signal's Litestak® status indicator may include up to (5) light modules (Model LSL) available in Amber, Blue, Clear, Green, and Red; or (4) light modules plus an optional sound module (Model LSH) to create a dual purpose audible/visual status indicator. The sound module always occupies the top position of a Litestak unit.

Litestak's lensing provides a 360° visual signal. Individual light modules may be set to either flash or steady. The flasher is included with the 120 Vac LSB model and sold separately for 24 Vdc. Each light module consists of two impact-resistant polycarbonate lens halves that snap apart to provide easy maintenance and interchangeability of colors.

Litestak units can be installed on a 3/4-inch NPT pipe mount or surface mounted with the Model LSB Base. If low profile surface mounting is required, Model LSBS is available. All Litestak models should be mounted base down.

Multiple lens colors can communicate machine shutdown, shortage of materials, supervisor attention, etc. Ideal applications for the Litestak include assembly lines, instrument panels, workcells, etc. Federal Signal's Litestak is an economical device for increasing productivity in any manufacturing environment.



LENS COLOR OPTIONS



FEATURES

- Available in 24 Vdc and 120 Vac
- (5) lens colors: Amber, Blue, Clear, Green, and Red
- Surface mount and integrated 3/4-inch NPT pipe mount
- Indoor use only
- Type 1 enclosure
- Optional sounders available
- CSA Certified
- UL and cUL Listed

MODEL	DESCRIPTION	VOLTAGE	OPERATING CURRENT	FLASH RATE/ MINUTE	LIGHT OUTPUT	MOUNT
LSB-024-240¹	Base	24-240 Vac/dc	N/A	N/A	N/A	3/4-inch NPT Pipe/Surface
LSB-120¹	Base	120 Vac 50/60 Hz	N/A	70	N/A	3/4-inch NPT Pipe/Surface
LSBS¹	Base	24-240 Vac/dc	N/A	N/A	N/A	Low Profile Surface
LSL-024^{2*}	Light Module	24 Vdc	0.76 A ^{**}	N/A	123 cd	N/A
LSL-120^{2*}	Light Module	120 Vac 50/60 Hz	0.13 A ^{**}	N/A	123 cd	N/A


¹ Cap kit included

² Model LSL includes lens, lamp and light module

* Indicates color: (A) Amber, (B) Blue, (C) Clear, (G) Green, or (R) Red

^{**} Operating current listed is for one module. For multiple modules, the current must be added together throughout the configuration to get the total operating current.

Litestak® Incandescent Status Indicators (LSL)

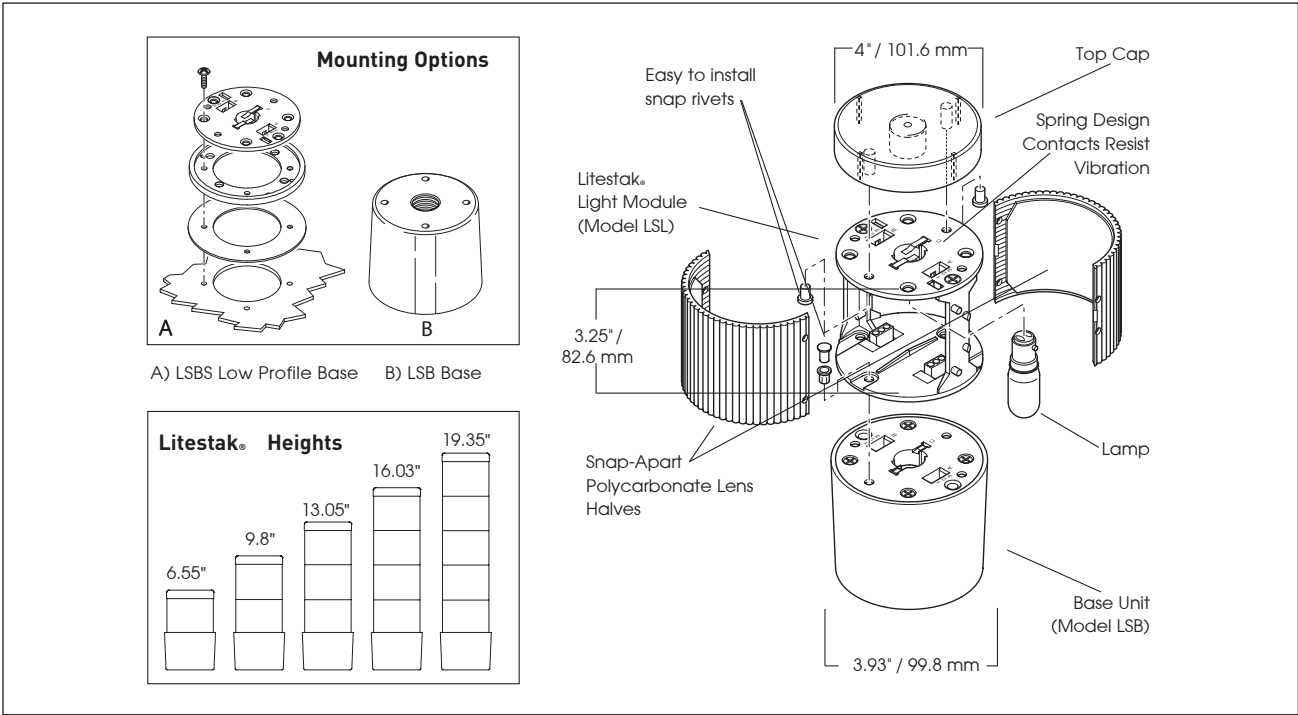

SPECIFICATIONS

Lamp Life:	2,500 Hours
Light Source:	Incandescent
Operating Temperature:	0° to 120°F (-18° to 49°C)
LSL	
Net Weight:	0.5 lb (0.2 kg)
Shipping Weight:	0.8 lb (0.4 kg)
Height:	3.25 in (82.6 mm)
Diameter:	3.93 in (99.8 mm)
LSB	
Net Weight:	0.75 lb (0.3 kg)
Shipping Weight:	1.0 lb (0.4 kg)
Height:	3.25 in (82.6 mm)
Diameter:	3.93 in (99.8 mm)
LSBS	
Height:	3.30 in (83.82 mm)
Diameter:	3.93 in (99.8 mm)

REPLACEMENT PARTS

Description	Part Number
Litestak Lens Kit ¹	K844700352A
Lamp, 24 Vdc	K8107210A
Lamp, 120 Vac	K8107194A
Flasher, 24 Vdc	K8285237A
Flasher, 120 Vac	K8285239A

¹ Includes 1 of each lens: Amber, Blue, Clear, Green, and Red (does not include blackout 1/2 lens, snap rivets and cap)

HOW TO ORDER

