

SERIE
1KVA / 2KVA / 3KVA

UPS ONLINE DE DOBLE CONVERSIÓN

- PROTECCIÓN TOTAL
- ENERGÍA ESTABLE
- RENDIMIENTO CONFIABLE




Features

- LED display or LCD display for option
- Microprocessor-based digital control
- Boost and buck AVR for voltage stabilization
- Auto sensing frequency
- Humanized alarm system
- Power-on self test
- Cold start
- Auto restart when mains power is restored
- Simulated sine wave output
- Intelligent battery management
- Short circuit, battery overcharge / overdischarge, overload, surge protections
- Automatic charging in OFF mode
- Optional no-load shutdown
- Optional RS232 / USB communication port and RJ11 / RJ45 protection

epcom
POWER ⚡ LINE

Rear Panel

1. Output Outlets (selectable)
2. TEL/Modem/Fax surge protection (optional)
3. USB (optional)
4. AC Input
5. Fuse / AC Breaker
6. Fan

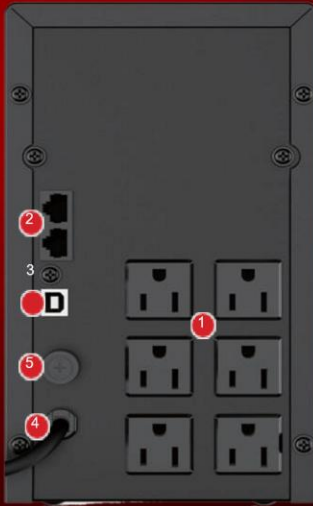

1000 - 2000 VA Metal



3000 VA Metal

Specifications

MODEL		EPU1000L	EPU2000L	EPU3000L
Capacity		1000 VA 600 W	2000 VA 1200 W	3000 VA 1800 W
INPUT				
Voltage		100 Vac / 110 Vac / 120 Vac : 80 ~ 150Vac		
Frequency		50 / 60 Hz ± 10% (auto-sensing)		
OUTPUT				
Voltage		100 Vac / 110 Vac / 120 Vac ± 10%		
Frequency		50 / 60 Hz ± 1% (auto-sensing)		
Waveform		Mains mode: pure sine wave; Battery mode: simulated sine wave		
Crest factor		3:1		
Transfer time		Typical 2 ~ 7 ms; Max.10 ms		
BATTERIES				
DC voltage		24 V	48 V	
Configuration		2 × 12 V / 7.0 Ah	2 × 12 V / 9.0 Ah	4 × 12 V / 9.0 Ah
Recharge time		6 ~ 8 h		
COMMUNICATIONS				
USB / RS232 / SNMP (options)		Supports Windows® 98/2000/2003/XP/Vista/2008/Windows®7/8/10		
OTHERS				
Protections		Short circuit - battery overcharge – overdischarge – overload - surge		
Humidity		20 ~ 90% RH @ 0 ~ 40°C (non-condensing)		
Noise level		≤ 45 dB (1 m)		
Plastic case	Net / Gross weight (kg)		/	/
	Dimensions (W × D × H) (mm)	100 × 280 × 140	/	/
	Packaged dimensions (W × D × H) (mm)	147 × 338 × 210	/	/
Metal case	Net / Gross weight (kg)	10.5 / 11.2	14.0 / 14.8	19.3 / 20.6
	Dimensions (W × D × H) (mm)	125 × 320 × 220	125 × 380 × 220	238 × 536 × 295
	Packaged dimensions (W × D × H) (mm)	180 × 390 × 295	180 × 450 × 295	238 × 536 × 295
Rack mount	Net/Gross weight (kg)		12.6 / 13.2	

• All specifications are subject to change without notice. •